



15 & 20 GALLON 2-NOZZLE ATV SPRAYERS



HIGHFLO
HIGH PERFORMANCE

BEST IN CLASS PUMP

- 2.4 GPM High Performance 12 Volt Pump
- Maximum Pressure Of 60 PSI
- Pressure Switch Turns Pump On & Off
- Self Priming
- Can Run Dry Without Damage
- Chemical Resistant Components
- Fan Cooled To Promote Longevity & Efficiency



MANIFOLD W/PRESSURE GAUGE

- Lever Ball Valves Allow Flow & Pressure Control
- Easily Monitor Pressure With Highly Visible Gauge
- Quick Connect Fittings Enables Fast Configuration



FUSE PROTECTED 8 FT LEAD WIRE

- Helps Protect Your Vehicle Wiring
- Alligator Clips & On/Off Switch Included



QUICK RELEASE BOOM CLAMPS

- Quickly And Easily Install Or Remove Boom
- Securely Clamps Boom Into Place



LEVER GRIP SPRAY WAND

- Up To 30 Feet Horizontal Spray
- Up To 16 Feet Vertical Spray
- Adjustable Spray Pattern



15 FEET OF 3/8 INCH HOSE

- Chemical Resistant Rubber Hose
- Easy To Wrap For Storage
- Less Prone To Kinking



PREMIUM SPRAY TIPS

- Premium Wide Angle Tips
- Reduces Chemical Drift
- Includes Anti-Drip Strainer



2-NOZZLE RIGID STEEL BOOM

- 2-Nozzle Boom Delivers 7 Feet Of Spray Coverage
- Solid Steel Boom




ATV-15-2-QR



ATV-20-2-QR

THIS SPRAYER CAN BE USED WITH:

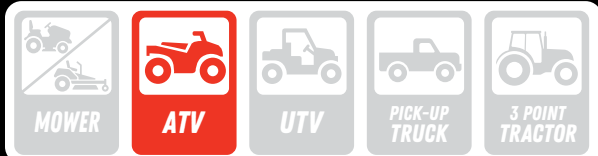

Sprayer Model	Sprayer Weight	Water Weight	Sprayer W/Water
ATV-15-2-QR	25 lbs	125 lbs	192 lbs
ATV-20-2-QR	27 lbs	209 lbs	194 lbs

Model #	Code #	Tank Size	Shipping Weight	Carton Size	Shipping Class	Cubic Feet	Ship Via	UPC Code
ATV-15-2-QR	5302318	15 Gallon	26#	40 x 19 x 16	150	7.1	GROUND	733029110022
ATV-20-2-QR	5302319	20 Gallon	27#	40 x 19 x 16	150	7.1	GROUND	733029110039

FOR DETAILED SPECS FIND ALL PRODUCT MANUALS AND PARTS BREAKDOWNS AT FIMCOINDUSTRIES.COM/MANUALS